


Product Specifications:

Voltage: AC90-240v
Power: 120w
Led: 12 *10W RGBW 4 in 1
Channel: 13CH / 15CH
Control mode: DMX / master / slave / voice control
Horizontal : 540°
Vertical : infinite rotation
Weight: 4 kg

Inno Pocket Beam 12

USER MANUAL

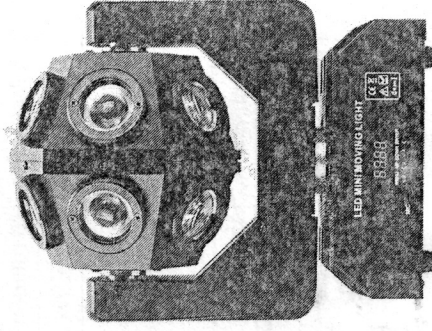

CE

Made In China

Menu Instruction:

Addr	A001-A512	512 address settings
CHnd	15CH	15 channel settings
	13CH	13 channel settings
SHnd	SOUND	Sound control
	AUTO	Self mode (speed sp01-99)
SEnS	0-99	Sound control sensitivity volume regulation
BLND	YES/NO	standby mode
LEd	OFF	Screen off after 5 seconds
	ON	Screen on
dISP	no	Show reverse
	YES	Show forward
PAN	no	X motor forward rotation
	YES	X motor reverse rotation
TiL	no	Y motor forward rotation
	YES	Y motor reverse rotation
MANU	PAN TiL	Manual test
TEST	TING	automatic testing
VER	V101	Software version number
LOAD	YES/NO	Restore factory settings

13CH:

CH	Number	Function description
1	0-255	Horizontal motor
2	0--255	Vertical motor
3	0-255	Vertical motor speed
4	0---255	Dimmer , 0---100% liner dimming
5	0—255	Strobe

6	0-255	0-100% Red dimming
7	0-255	0-100% Green dimming
8	0-255	0-100% Blue dimming
9	0-255	0-100% White dimming
10	0-255	Color auto work
11	0-255	Motor auto work
12	0-255	Auto speed
13	250-255	Rest (Effective after 5 seconds)

15CH:

CH	Number	Function description
1	0-255	Horizontal motor
2	0-255	Horizontal fine tuning
3	0--255	Vertical motor
4	0-255	Vertical fine tuning
5	0-255	Vertical motor speed
6	0---255	Dimmer , 0---100% liner dimming
7	0—255	Strobe
8	0-255	0-100% Red dimming
9	0-255	0-100% Green dimming
10	0-255	0-100% Blue dimming
11	0-255	0-100% White dimming
12	0-255	Color auto work
13	0-255	Motor auto work
14	0-255	Auto speed
15	250-255	Rest (Effective after 5 seconds)